






Turning




PARTING AND GROOVING TOOLS

Parting and grooving tools overview	B142-B143
Parting, grooving and profiling inserts code key	B148
Parting, grooving and profiling inserts	B149-B154
External and face cutting tools code key	B155
Parting, grooving tools	B156-B163
Internal cutting tools code key	B164
Internal grooving and turning tools	B165
Recommended cutting parameters for parting and grooving	B166
General information	B167



Parting and grooving tools overview

Machining application	Machining type	Applicable tools	Corresponding inserts	Tool's feature and parameters
External machining	Parting	The little squirrel series QZ□□+QE□□  B160-B161	Parting inserts ZP□□□□ 	- Assemble structure of parting blade and holder, good rigidity and parting range is adjustable. - The maximum parting diameter is 4.724inch.
		The little squirrel series QE□□R/L  B156-B157	ZP□D□□  ZP□S□ 	- Inserts have 3d chipbreaker, small cutting force, good performance on chip breaking. - The maximum parting diameter is 2.362inch.
	Grooving and turning	The little squirrel series QE□□R/L  B156-B157	Double cutting edges for parting ZT□D□□ 	- Various applications can be realised by one single tool, installed with different inserts for grooving, profiling and parting, It reduces the tool category. - Installed with grooving inserts, the tool realizes grooving and transverse cutting. It's multifunction tool. - The maximum slot depth can be machined is 1.181inch.
			Profile turning ZR□D□□  Single cutting edge for deep grooving ZT□S□□ 	
	Precise grooving	The little squirrel series QECD  B158	Precise grooving ZT□D□□-EG  Edge width 0.047~0.094inch	- Grinded insert, used for precise grooving. - Edge width can be any size between 0.039~0.256inch according to customers, requirement. - ZT□D□□-EG inserts: When edge width is between 0.047~0.094inch, the maximum cutting depth is 0.098inch; When edge width is >0.094~0.256inch, the maximum cutting depth is 0.866inch.
		The little squirrel series QE□□R/L  B156-B157	Precise grooving ZT□D□□-EG  Edge width 0.039~0.256inch	

Machining application	Machining type	Applicable tools	Corresponding inserts	Tool's feature and parameters
Internal machining	Grooving and turning	The little squirrel series C□□□□□-Q□DR/L  B165	Grooving, Turning ZT□□□□  Profile turning ZR□□□□ 	- By installing different inserts for grooving and profiling, one single tool realizes various applications, it reduce the tool category. - The maximum slot depth can be machined is 0.512inch. - The minimum diameter can be machined is 1.063inch.
End machining	Grooving and turning	The little squirrel series QF□□□□H  B161-B162	Grooving, Turning ZT□□□□  Profile turning ZR□□□□ 	- By installing different inserts as for grooving and profiling, one single tool realizes various applications, it reduces the tool category. - Grooving diameter 1.890~15.748inch. - Grooving depth 0.394~1.181inch.
Recess machining	Recess and turning	The little squirrel series QX□□□□□□  B159	Grooving, Turning ZT□□□□  Profile turning ZR□□□□ 	- The unique tool for recess machining. - Various recess machining can be realized, inserts specification is complete.
Tools for aviation and aerospace industries	External machining	The little squirrel series QE□S□□-□□R/L  B158	The little squirrel series ZIG□□□  The little squirrel series ZIMF□□ 	- V-type locating, top clamping, precise locating, safe clamping. - Normal square-ended inserts and precise square-ended inserts are suitable for adhesive materials hard to machine such as Ni-base hightemperature alloy, Ti alloy and stainless steel, etc.

**Little squirrel
series**

-EG

Precise grooving and profile turning inserts


Special chipbreaker design, suitable for precise grooving of low-carbon steel, stainless steel, adhesive materials and non-ferrous metal.

-EG

Precise grooving inserts

The edge width can be alternative between 0.039-0.256inch according to your requirements.

0.039~0.094inch

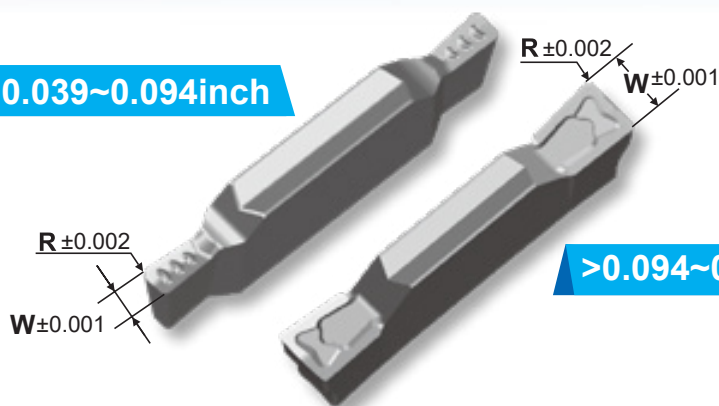


>0.094~0.256inch

The tolerance of the edge width S of precise grooving and profiling inserts can reach ± 0.001 . Inserts can also be mounted on the corresponding specifications of original tool series.

-EG

Precise profile turning inserts

The Little Squirrel series precise profiling and turning inserts are mainly used for Precise grooving and profiling.

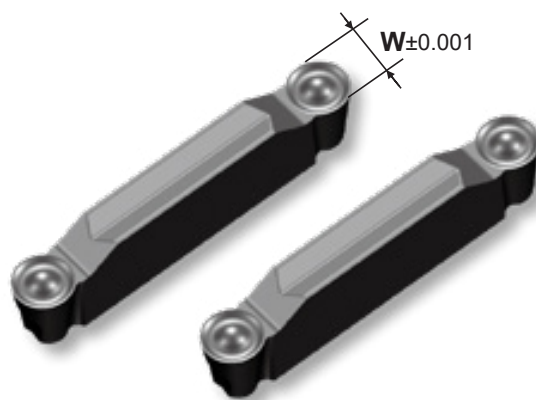

The width of the Little Squirrel series precise grooving inserts can be alternative between 0.039inch to 0.256inch, which means products with any edge width or nose radius can be provided according to customers' requirements. The inserts are mainly used for precise grooving, such as sealing slot and locating slot, etc.


-MG *Little squirrel series*

-MG Series Chipbreaker

Suitable for parting, grooving, profiling, and turning. Good chip control and chip evacuation for good surface finish.

Insert design allows for use in many applications with need for fewer insert grades and configurations.


Inserts with the same cutting edge width can be used with different holders. Standardization with fewer inserts for internal, external, grooving and turning reduces tool inventory and tool management cost.

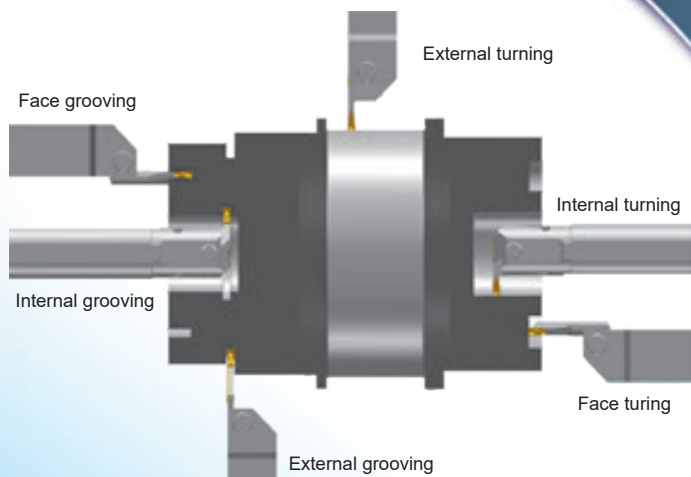


20% reduction in cutting force and reduced vibration.

Unique design of parting insert

- Insert uses specially designed flank to reduce cutting resistance by 20% with reduced machined surface ovality.
- A special design of the cutting edge requires less rigidity of machine. Older and lower horsepower machines can be used more productively.

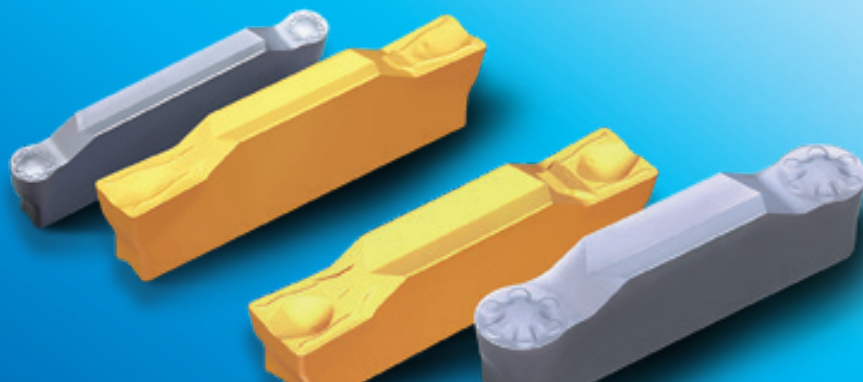

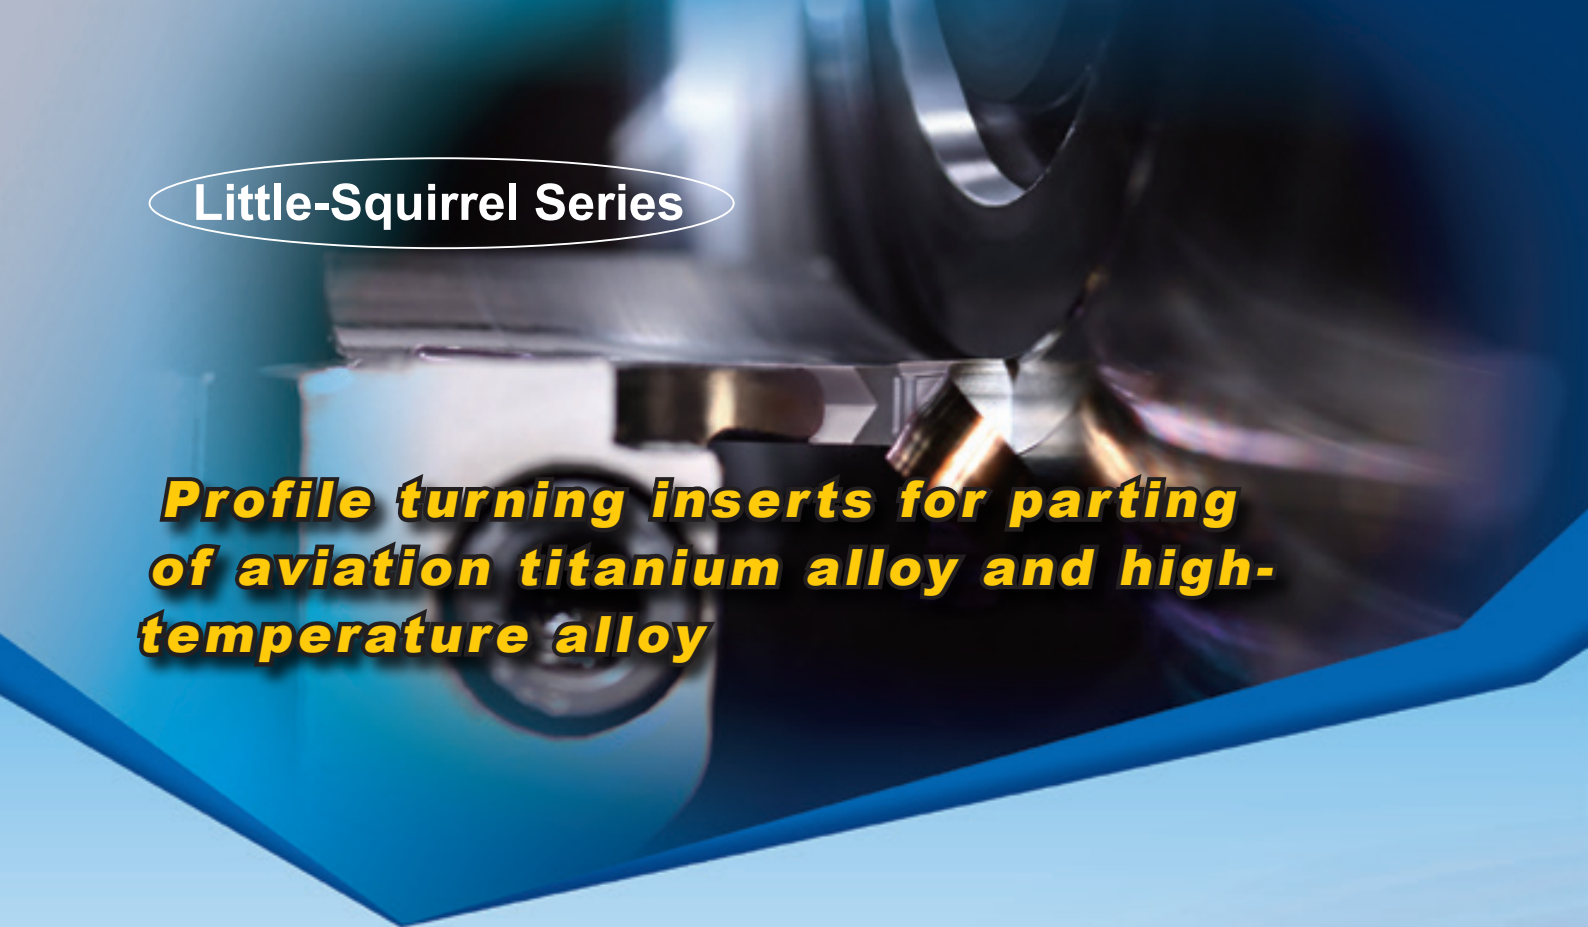


Little-Squirrel Series

Profile turning inserts for parting of aviation titanium alloy and high-temperature alloy

-NF

Single-headed precision profile turning inserts


Sharp edge, small cutting force, good surface quality;
Indexing accuracy reaches ± 0.001 inch, safe and stable clamping;
Mainly applied in finishing of high-temperature alloy, titanium alloy.

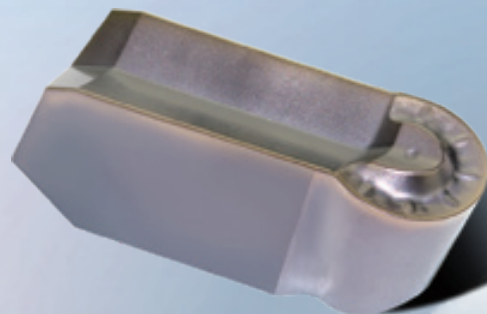

-NM

Precision profile turning inserts


Sharp edge, small cutting force, good surface quality;
Indexing accuracy reaches ± 0.001 inch;
Highly economical, two edges available;
Compatible with little squirrel tool holder, suitable for small depth profile finishing and semi-finishing of high-temperature alloy and Ti-alloy.

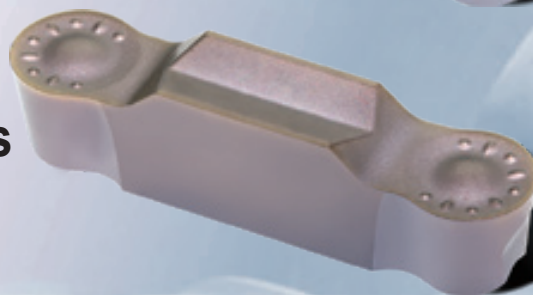

-SM

Single-headed groove turning inserts


Straight edge, excellent surface quality;
Sharp edge, smaller cutting force;
Good chip breaking;
Mainly used for rough machining of high-temperature alloy and titanium alloy.

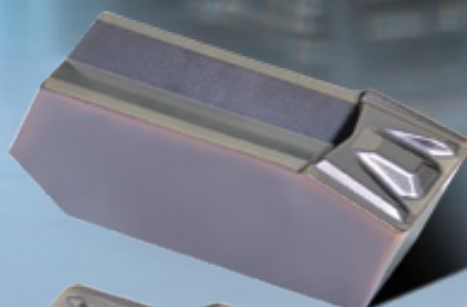

-MM

Straight edge groove turning inserts

High edge strength, sharp edge;
Highly economical, two edges available, compatible with little squirrel tool holder;
With special grades, suitable for roughing with small cutting depths of high-temperature alloy and titanium alloy.

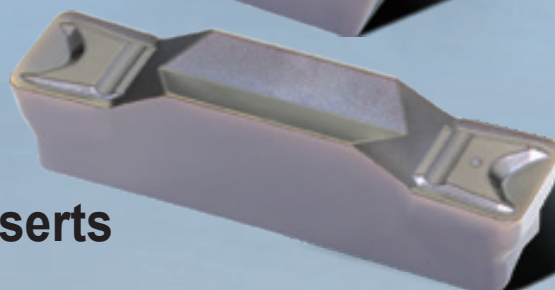

Case

Insert: YBG105/ZIMF604N-SM
Hardness of workpiece material: GH4169 (HB380)
Cutting data: $V=150$ SFPM, $f=0.008$ in/r
Coolant: water



Products of company A



YBG105/ZIMF604N-SM

Conclusion: Under the same conditions, chip breaking performance is better and the time for stopping the removal of long winding chips is reduced.



Parting, grooving and profiling inserts code key

Application of inserts

ZP > Parting **ZT** > Grooving and turning
ZR > Profile machining

Code of locating slot


Code of locating slot	A	B	E	F	G	H	K
Width of cutting edge	0.059	0.079	0.098	0.118	0.157	0.197	0.236

Number of cutting edge

S > Single cutting edge **D** > Double cutting edges


ZP G D 04 04 - M G

Width of cutting edge



01=0.059" 02=0.079"
 025=0.098" 05=0.197"
 03=0.118" 06=0.236"
 04=0.157"

Nose radius



02=0.008" 04=0.016"
 03=0.012" 06=0.236"


Tolerances

M > M class tolerance **E** > E class tolerance

Chipbreaker code

G > General chip-breakers, suitable for all kinds of machined materials
F > Special chip-breakers


Parting inserts

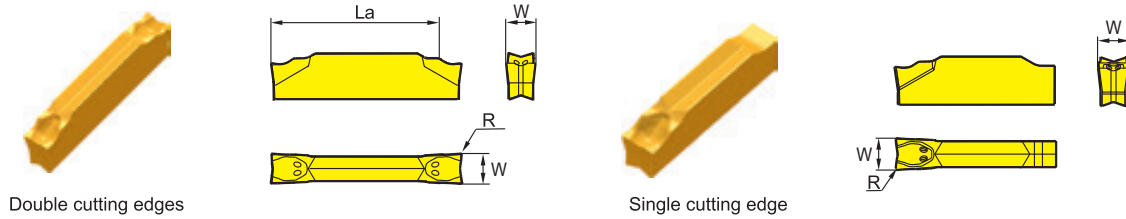

Type	Dimension(inch)			Grade							
	W ₀ ^{+0.004}	R±0.002	La _{max}	P		M			K		
				YBG202	YBG302	YBG202	YBG302	YD201	YBG302	YD201	YBG102
Double cutting edges	ZPAD01502-MG	0.059	0.008	0.472	○		○		○		
	ZPBD0202-MG	0.079	0.008	0.551		○		○	○		
	ZPED02502-MG	0.098	0.008	0.670	○	●	○	●	●		
	ZPFD0302-MG	0.118	0.008	0.670		○		○	○		
	ZPGD0402-MG	0.157	0.008	0.866		○		○	○		
	ZPHD0503-MG	0.197	0.012	0.866		○		○	○		
Single cutting edge	ZPKD0604-MG	0.236	0.016	0.866		○		○	○		
	ZPES02502-MG	0.098	0.008	--	○	●	○	●	●		
	ZPFS0302-MG	0.118	0.008	--		○		○	○		
	ZPGS0402-MG	0.157	0.008	--		○		○	○		
	ZPHS0503-MG	0.197	0.012	--		○		○	○		
	ZPKS0604-MG	0.236	0.016	--		○		○	○		

Insert with single cutting edge only be used to parting blade

● Always stock available ○ Produce according to order

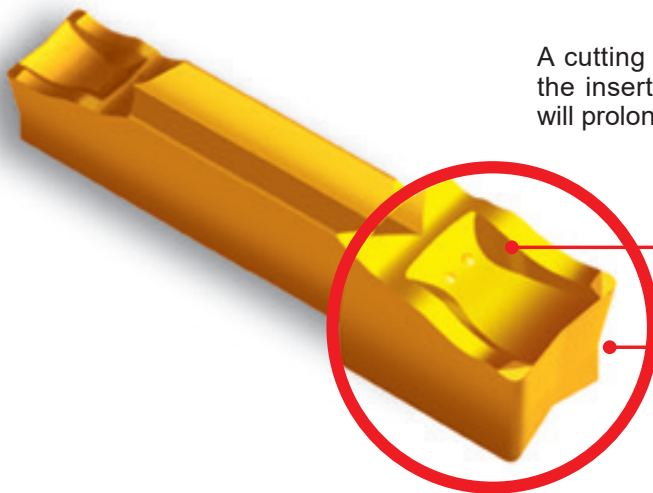

A cutting speed reduction of 30% is preferred when the insert is approaching the workpiece. This action will prolong tool life.

Enhanced chipbreaker design improves chip control.


20% cutting force reduction and reduced vibrations.

QE□□R/L



Applicable tool

Grooving, turning inserts

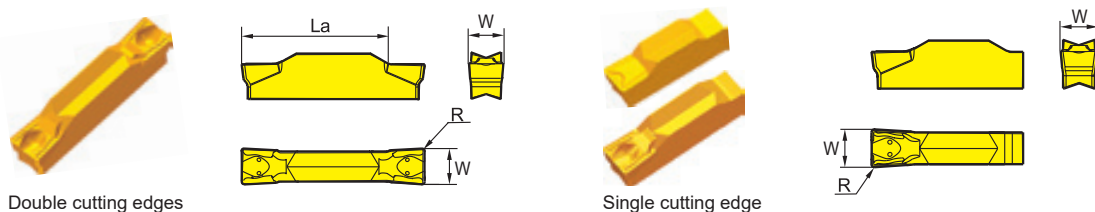

Type		Dimension(inch)			Grade							
					P		M			K		
		$W^{+0.004}_0$	$R \pm 0.002$	L_{max}	YBG202	YBG302	YBG202	YBG302	YD201	YBG302	YD201	YBG102
Double cutting edges	ZTED02503-MG	0.098	0.012	0.670	●	●	●	●		●		
	ZTFD0303-MG	0.118	0.012	0.670	●	●	●	●		●		
	ZTGD0404-MG	0.157	0.016	0.866	●	●	●	●		●		
	ZTHD0504-MG	0.197	0.016	0.866	●	●	●	●		●		
	ZTKD0608-MG	0.236	0.031	0.866	●	●	●	●		●		
Single cutting edge	ZTHS0504-MG	0.197	0.016	--	○	○	○	○		○		
	ZTKS0608-MG	0.236	0.031	--	○	○	○	○		○		






● Always stock available ○ Produce according to order

Grooving, turning inserts




Type		Dimension(inch)			Grade							
					P		M			K		
		$W^{+0.004}_0$	$R \pm 0.002$	L_{max}	YBG202	YBG302	YBG202	YBG302	YD201	YBG302	YD201	YBG102
Double edges	ZTAD01502-MM	0.059±0.001	0.008	0.472	●	○	●	○		○		
	ZTBD02002-MM	0.079±0.001	0.008	0.551	●	○	●	○		○		
	ZTED02503-MM	0.098±0.001	0.012	0.670	●	○	●	○		○		
	ZTFD0303-MM	0.118±0.001	0.012	0.670	●	○	●	○		○		
	ZTGD0404-MM	0.157±0.002	0.016	0.866	●	○	●	○		○		
	ZTHD0504-MM	0.197±0.002	0.016	0.866	●	○	●	○		○		
	ZTKD0608-MM	0.236±0.002	0.031	0.866	●	○	●	○		○		
	ZTLD0808-MM	0.315±0.002	0.031	1.102	●	○	●	○		○		

● Always stock available ○ Produce according to order



Applicable tool

Precision grooving and turning inserts





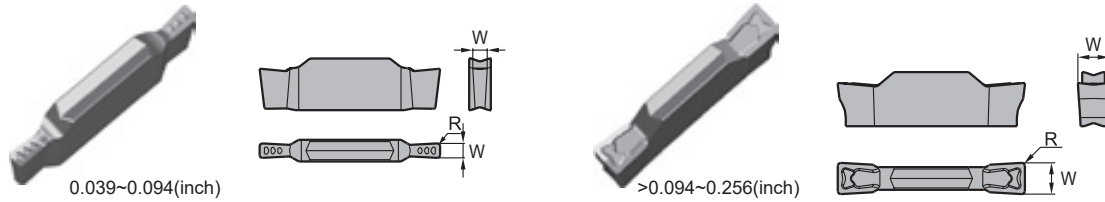


Type		Dimension(inch)			Grade							
					P		M			K		
		W ^{+0.004} ₀	R±0.002	L _{amax}	YBG202	YBG302	YBG202	YBG302	YD201	YBG302	YD201	YBG102
Double cutting edges	ZTCD□□□□ ⁽¹⁾ -EG	0.039-0.094	Please see annotations (2)	0.670	○	○	○	○	○	○		
	ZTED□□□□-EG	0.094-0.118		0.670	○	○	○	○	○	○		
	ZTFD□□□□-EG	0.118-0.150		0.670	○	○	○	○	○	○		
	ZTGD□□□□-EG	0.150-0.189		0.866	○	○	○	○	○	○		
	ZTHD□□□□-EG	0.189-0.228		0.866	○	○	○	○	○	○		
	ZTKD□□□□-EG	0.228-0.256		0.866	○	○	○	○	○	○		

● Always stock available ○ Produce according to order


Note: (1)The code indicated with * is to be designated based on the edge width and edge radius. The code will be ZTFD03503-EG if the ordered inserts is with an edge width of 0.138inch and an edge radius of 0.118inch.

(2)Edge radius R is based on customers'requiremen.




Applicable tool

Single-head grooving and turning inserts for semi-finishing to roughing in difficult-to-machine materials




Type	Dimension(inch)				Grade			
					S			
	W±0.002	R±0.004	b	L	YBG105	YBG212	YBS103	YD101
ZIMF304N-SM	0.118	0.016	0.094	0.602	●	●	○	○
ZIMF404N-SM	0.157	0.016	0.126	0.602	●	●	○	○
ZIMF504N-SM	0.197	0.016	0.157	0.602	●	●	○	○
ZIMF604N-SM	0.236	0.016	0.201	0.602	●	●	○	○

● Always stock available ○ Produce according to order



Applicable tool


Precision grooving and turning inserts



Type	Dimension(inch)			Grade							
	$W^{+0.004}_0$	$R\pm 0.002$	$L_{a\max}$	P		M			K		
				YBG202	YBG302	YBG202	YBG302	YD201	YBG302	YD201	YBG102
Double cutting edges	ZRED025-MG	0.098	0.049	0.787	●	●	●	●	●	●	●
	ZRFD03-MG	0.118	0.059	0.787	●	●	●	●	●	●	●
	ZRGD04-MG	0.157	0.079	0.984	●	●	●	●	●	●	●
	ZRHD05-MG	0.197	0.098	0.984	○	●	○	●	●	●	●
	ZRKD06-MG	0.236	0.118	0.984	●	●	●	●	●	●	●

● Always stock available ○ Produce according to order

Profile turning inserts for difficult-to-machine materials



Type	Dimension(inch)		Grade		
	$W^{+0.004}_0$	$L_{a\max}$	S		
			YBG105	YBG212	YBS103
Double edge	ZRFD03-NM	0.118	0.669	●	○
	ZRGD04-NM	0.157	0.827	●	○
	ZRHD05-NM	0.197	0.787	●	○
	ZRKD06-NM	0.236	0.748	●	○

● Always stock available ○ Produce according to order

QE□□R/L



► B156-157

QX□□DR/L



► B159


C□□□□-Q□DR/L



► B165


Applicable tool

Precision grooving and turning inserts




Type		Dimension(inch)			Grade							
					P		M			K		
		W±0.001	R±0.002	La _{max}	YBG202	YBG302	YBG202	YBG302	YD201	YBG302	YD201	YBG102
Double cutting edges	ZRFD03-EG	0.118	0.059	0.787		○		○	○	○		
	ZRGD04-EG	0.157	0.079	0.984		○		○	○	○		
	ZRHD05-EG	0.197	0.098	0.984		○		○	○	○		
	ZRKD06-EG	0.236	0.118	0.984		○		○	○	○		


● Always stock available ○ Produce according to order



Applicable tool




Single-head grooving and turning inserts for precision profiling in difficult-to-machine materials



Type	Dimension(inch)			Grade			
				S			
	W±0.001	b	L	YBG102	YBG202	YBS103	YD101
ZIGQ3N-NM	0.118	0.094	0.602	●	○	●	○
ZIGQ4N-NM	0.157	0.126	0.602	●	○	●	○
ZIGQ5N-NM	0.197	0.157	0.602	●	○	○	○
ZIGQ6N-NM	0.236	0.201	0.602	●	○	○	○


● Always stock available ○ Produce according to order



Applicable tool



Single-head grooving and turning inserts for precision profiling in difficult-to-machine materials



Type	Dimension(inch)			Grade		
				S		
	W±0.001	b	L	YBG105	YBG212	YBS103
ZIGQ3N-NF	0.118	0.094	0.602	●	●	○
ZIGQ4N-NF	0.157	0.126	0.602	●	●	○
ZIGQ5N-NF	0.197	0.157	0.602	●	●	○
ZIGQ6N-NF	0.236	0.200	0.602	●	●	○

● Always stock available ○ Produce according to order

QE□S□□-□□R/L



► B158

Applicable tool

External and face cutting tools code key

Code of grooving holder

Cutting style

- E > External Cutting
F > Face Cutting

Code of locating slot

Accords with locating slot code of insert and corresponding to the width of cutting edge.

Code of locating slot	A	B	E	F	G	H	K	L
Width of cutting edge	1.5	2.0	2.5	3.0	4.0	5.0	6.0	8.0

Number of cutting edge

- S > Single cutting edge
D > Double cutting edges

Shank height and width

Code	08	10	12	16	20	24
Tool body dimension(inch)	0.5×0.5	0.625×0.625	0.750×0.750	1.000×1.000	1.250×1.250	1.500×1.500

Q E G D 12 - 04 C R 22

Q F G D 16 - 04 D R 22 - 64 H

Width of initial cut

Length of the tool body

Code	C	D	E
length (inch)	5	6	7

Cutting direction


- R > Right hand
L > Left hand

Maximum cutting depth(a_{max})Minimum diameter for first cut with face grooving holders ($\varnothing D_{min-max}$)



Holder type of end surface grooving tools

- H > 0°
L > 90°

External parting, grooving and turning tools

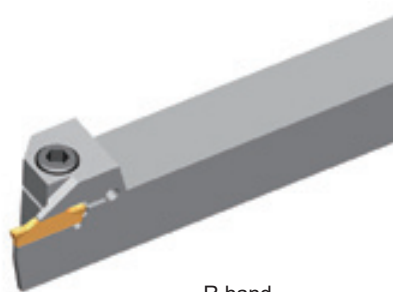


R hand

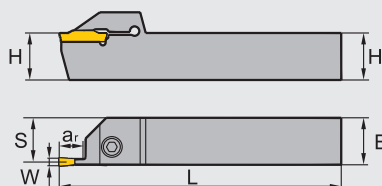



Type		Dimension(inch)					Applicable inserts	Screw	Wrench
		H×B	L	S	W	a _r max			
QEAD	08-015CR/L07	0.500×0.500	5	0.478	0.059	0.276	Z□AD015□□	GB70-85-M5×16	WH40L
	08-015CR/L12	0.500×0.500	5	0.478	0.059	0.472	Z□AD015□□		
	10-015CR/L07	0.625×0.625	5	0.636	0.059	0.276	Z□AD015□□		
	10-015CR/L12	0.625×0.625	5	0.636	0.059	0.472	Z□AD015□□		
	12-015CR/L07	0.750×0.750	5	0.793	0.059	0.276	Z□AD015□□		
	12-015CR/L12	0.750×0.750	5	0.793	0.059	0.472	Z□AD015□□		
QEBD	08-02CR/L07	0.500×0.500	5	0.479	0.079	0.276	Z□BD02□□	GB70-85-M5×16	WH40L
	08-02CR/L10	0.500×0.500	5	0.479	0.079	0.394	Z□BD02□□		
	08-02CR/L14	0.500×0.500	5	0.479	0.079	0.551	Z□BD02□□		
	10-02CR/L07	0.625×0.625	5	0.636	0.079	0.276	Z□BD02□□		
	10-02CR/L10	0.625×0.625	5	0.636	0.079	0.394	Z□BD02□□		
	10-02CR/L14	0.625×0.625	5	0.636	0.079	0.551	Z□BD02□□		
	12-02CR/L07	0.750×0.750	5	0.794	0.079	0.276	Z□BD02□□		
	12-02CR/L10	0.750×0.750	5	0.794	0.079	0.394	Z□BD02□□		
	12-02CR/L14	0.750×0.750	5	0.794	0.079	0.551	Z□BD02□□	GB70-85-M6×20	WH50L
	16-02DR/L07	1.000×1.000	6	0.991	0.079	0.276	Z□BD02□□		
	16-02DR/L10	1.000×1.000	6	0.991	0.079	0.394	Z□BD02□□		
	16-02DR/L14	1.000×1.000	6	0.991	0.079	0.551	Z□BD02□□		
QEED	10-025CR/L10	0.625×0.625	5	0.591	0.098	0.394	Z□ED025□□	GB70-85-M5×20	WH40L
	10-025CR/L17	0.625×0.625	5	0.591	0.098	0.669	Z□ED025□□		
	12-025CR/L10	0.750×0.750	5	0.748	0.098	0.394	Z□ED025□□	GB70-85-M6×20	WH50L
	12-025CR/L17	0.750×0.750	5	0.748	0.098	0.669	Z□ED025□□		
	16-025DR/L10	1.000×1.000	6	0.945	0.098	0.394	Z□ED025□□		
	16-025DR/L17	1.000×1.000	6	0.945	0.098	0.669	Z□ED025□□		
QEFD	10-03CR/L10	0.625×0.625	5	0.583	0.118	0.394	Z□FD03□□	GB70-85-M5×20	WH40L
	10-03CR/L17	0.625×0.625	5	0.583	0.118	0.669	Z□FD03□□		
	12-03CR/L10	0.750×0.750	5	0.740	0.118	0.394	Z□FD03□□	GB70-85-M6×20	WH50L
	12-03CR/L17	0.750×0.750	5	0.740	0.118	0.669	Z□FD03□□		
	16-03DR/L10	1.000×1.000	6	0.937	0.118	0.394	Z□FD03□□		
	16-03DR/L17	1.000×1.000	6	0.937	0.118	0.669	Z□FD03□□		
QEGD	12-04CR/L13	0.750×0.750	5	0.728	0.157	0.512	Z□GD04□□	GB70-85-M6×20	WH50L
	12-04CR/L22	0.750×0.750	5	0.728	0.157	0.866	Z□GD04□□		
	16-04DR/L13	1.000×1.000	6	0.925	0.157	0.512	Z□GD04□□		

© Parting, grooving, turning, profiling inserts are adaptable to the tools

External parting, grooving and turning tools

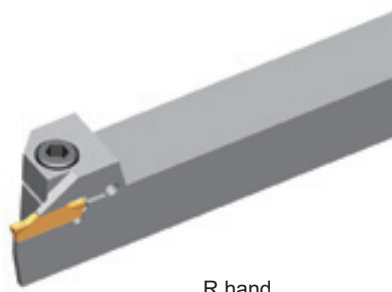


R hand

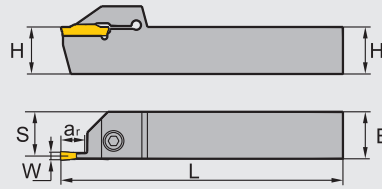



Type		Dimension(inch)					Applicable inserts	Screw	Wrench
		H×B	L	S	W	a _r max			
QEGD	16-04DR/L22	1.000×1.000	6	0.925	0.157	0.866	Z□GD04□□	GB70-85-M6×20	WH50L
	20-04ER/L13	1.250×1.250	7	1.201	0.157	0.512	Z□GD04□□		
	20-04ER/L22	1.250×1.250	7	1.201	0.157	0.866	Z□GD04□□		
QEHD	16-05DR/L13	1.000×1.000	6	0.906	0.197	0.512	Z□HD05□□	GB70-85-M6×20	WH50L
	16-05DR/L22	1.000×1.000	6	0.906	0.197	0.866	Z□HD05□□		
QEHS	16-05DN30	1.000×1.000	6	0.492	0.197	1.181	Z□HS05□□		
QEHD	20-05ER/L13	1.250×1.250	7	1.181	0.197	0.512	Z□HD05□□		
	20-05ER/L22	1.250×1.250	7	1.181	0.197	0.866	Z□HD05□□		
QEHS	20-05EN30	1.250×1.250	7	0.630	0.197	1.181	Z□HS05□□		
QEKD	16-06DR/L13	1.000×1.000	6	0.890	0.236	0.512	Z□KD06□□	GB70-85-M6×20	WH50L
	16-06DR/L22	1.000×1.000	6	0.890	0.236	0.866	Z□KD06□□		
QEKS	16-06DN30	1.000×1.000	6	0.492	0.236	1.181	Z□KS06□□		
QEKD	20-06ER/L13	1.250×1.250	7	1.165	0.236	0.512	Z□KD06□□		
	20-06ER/L22	1.250×1.250	7	1.165	0.236	0.866	Z□KD06□□		
QEKS	20-06EN30	1.250×1.250	7	0.630	0.236	1.181	Z□KS06□□		
QELD	16-08DR/L16	1.000×1.000	6	0.886	0.315	0.630	ZTLD0808-MM	GB70-85-M6×20	WH50L
	16-08DR/L25	1.000×1.000	6	0.886	0.315	0.984	ZTLD0808-MM		
	20-08ER/L28	1.250×1.250	7	1.142	0.315	1.102	ZTLD0808-MM	GB70-85-M8×30	

© Parting, grooving, turning, profiling inserts are adaptable to the tools

External parting, grooving and turning tools

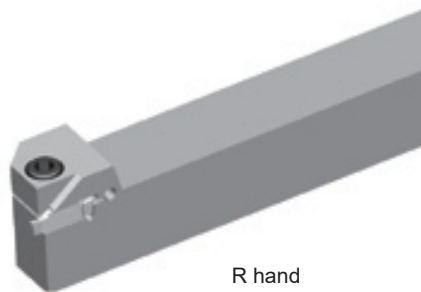


R hand

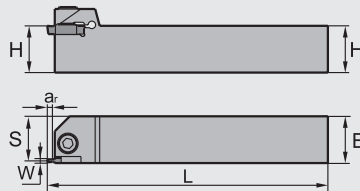


Type		Dimension(inch)					Applicable inserts	Screw	Wrench
		H×B	L	S	W	a _{max}			
QECD	10-XCR/L025	0.625×0.625	5	0.581	0.039~0.256 (Made to order)	0.098	ZTCD□□□□-EG	GB70-85-M5×20	WH40L
	12-XCR/L025	0.750×0.750	5	0.738		0.098			
	16-XCR/L025	1.000×1.000	6	0.935		0.098			

External grooving tools for materials hard to be machined

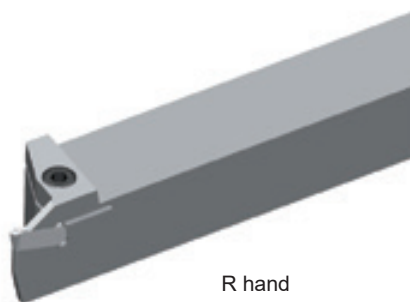


R hand


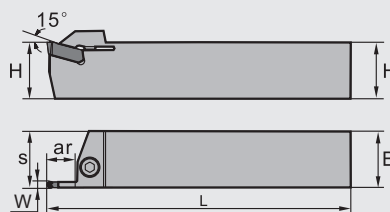


Type		Dimension(inch)					Applicable inserts	Screw	Wrench
		H×B	L	S	W	a _{max}			
QEFS16-03DR/L12		1.000×1.000	6	1.000	0.118	0.472	ZIGQ3N-□□ ZIMF304N-□□	GB70-85-M6×20	WH50L
QEGS16-04DR/L12		1.000×1.000	6	1.000	0.157	0.472	ZIGQ4N-□□ ZIMF40□N-□□		
QEHS16-05DR/L12		1.000×1.000	6	1.000	0.197	0.472	ZIGQ5N-□□ ZIMF50□N-□□		
QEKs16-06DR/L12		1.000×1.000	6	1.000	0.236	0.472	ZIGQ6N-□□ ZIMF60□N-□□		

Precision grooving and turning tools

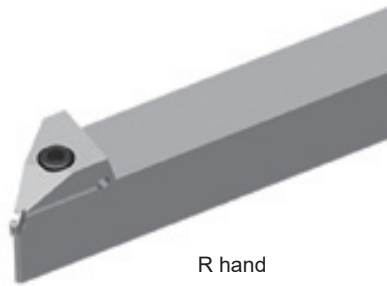

R hand

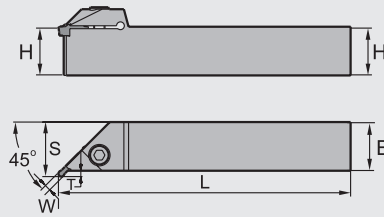

Type		Dimension(inch)					Applicable inserts	Screw	Wrench
		H×B	L	S	W	amax			
QXFD	12-03CR/L03	0.750×0.750	5	0.906	0.118	0.118	ZR(T)FD03-EG ZR(T)FD03-MG	GB70-85-M6×20	WH50L
	16-03DR/L03	1.000×1.000	6	1.102					
	20-03ER/L03	1.250×1.250	7	1.378					
QXGD	12-04CR/L03	0.750×0.750	5	0.906	0.157	0.118	ZR(T)GD04-EG ZR(T)GD04-MG		
	16-04DR/L03	1.000×1.000	6	1.102					
	20-04ER/L03	1.250×1.250	7	1.378					
QXHD	12-05CR/L04	0.750×0.750	5	0.945	0.197	0.157	ZR(T)HD05-EG ZR(T)HD05-MG		
	16-05DR/L04	1.000×1.000	6	1.142					
	20-05ER/L04	1.250×1.250	7	1.417					
QXKD	12-06CR/L04	0.750×0.750	5	0.945	0.236	0.157	ZR(T)KD06-EG ZR(T)KD06-MG		
	16-06DR/L04	1.000×1.000	6	1.142					
	20-06ER/L04	1.250×1.250	7	1.417					

Parting blade holder code key

Code of parting blade holder

Number of cutting edge

- S > Single cutting edge
- D > Double cutting edges



Size of holders

code of holders	0750	1000	1250
Size of holders (inch)	0.750	1.000	1.250

Height of blade



QZ S 1250 32

Parting Blade Holders




Type	Dimension(inch)						Clamps	Screw	Wrench
	L	H	h ₁	h ₂	B	B ₁			
QZS0750-26	3.386	0.750	0.394	1.835	0.748	1.496	QZC26	GB70-85-M6×20	WH50L
QZS1000-26	3.386	1.000	0.197	1.835	0.906	1.654	QZC26		
QZS1250-26	3.386	1.250	0.118	2.031	1.181	1.890	QZC26		
QZS0750-32	4.331	0.750	0.512	1.969	0.748	1.496	QZC32		
QZS1000-32	4.331	1.000	0.315	1.969	0.906	1.654	QZC32		
QZS1250-32	4.331	1.250	0.197	2.126	1.181	1.890	QZC32		

External Parting Blade

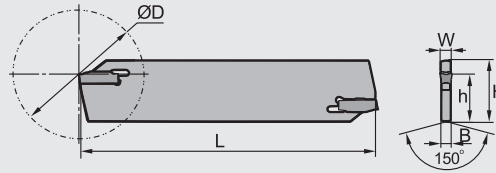


Type	Dimension(inch)						Inserts	Wrench
	L	H	h	B	W	ØDmax		
QEES26N	4.331	1.024	0.748	0.079	0.098	2.362	ZPES02502-MG	W50RL
QEFS26N	4.331	1.024	0.748	0.094	0.118	2.362	ZPFS0302-MG	
QEGS26N	4.331	1.024	0.748	0.126	0.157	2.756	ZPGS0402-MG	
QEHS26N	4.331	1.024	0.748	0.157	0.197	2.756	ZPHS0503-MG	
QEKS26N	4.331	1.024	0.748	0.197	0.236	2.756	ZPKS0604-MG	
QEES32N	5.906	1.260	0.969	0.079	0.098	3.937	ZPES02502-MG	
QEFS32N	5.906	1.260	0.969	0.094	0.118	3.937	ZPFS0302-MG	
QEGS32N	5.906	1.260	0.969	0.126	0.157	4.724	ZPGS0402-MG	
QEHS32N	5.906	1.260	0.969	0.157	0.197	4.724	ZPHS0503-MG	
QEKS32N	5.906	1.260	0.969	0.197	0.236	4.724	ZPKS0604-MG	

Face Grooving and Turning Tools

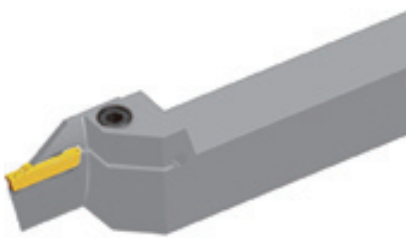


L hand

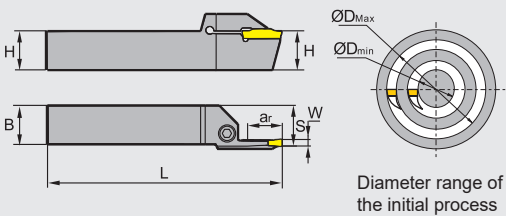


Type	Dimension(inch)						Inserts	Screw	Wrench
	H×B	L	S	W	ar	ØD (min-max)			
QFFD16-03DR/L10-48H	1.000×1.000	6	1.024	0.118	0.394	1.890-2.598	ZTFD0303-MG	GB70-85-M6×20	WH50L
QFFD16-03DR/L17-48H	1.000×1.000	6	1.024	0.118	0.669	1.890-2.598			
QFFD16-03DR/L10-60H	1.000×1.000	6	1.024	0.118	0.394	2.362-3.150			
QFFD16-03DR/L17-60H	1.000×1.000	6	1.024	0.118	0.669	2.362-3.150			
QFFD16-03DR/L10-74H	1.000×1.000	6	1.024	0.118	0.394	2.913-4.331			
QFFD16-03DR/L17-74H	1.000×1.000	6	1.024	0.118	0.669	2.913-4.331			

Face Grooving and Turning Tools

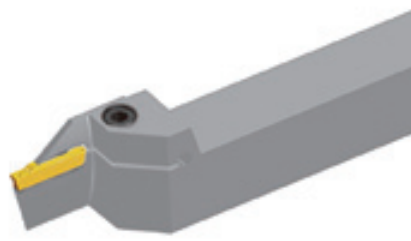


L hand

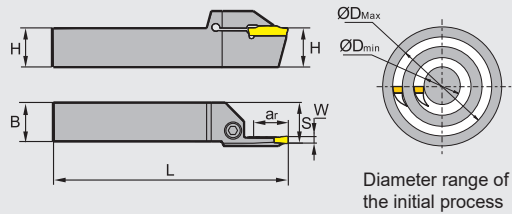

Type	Dimension(inch)						Inserts	Screw	Wrench
	H×B	L	S	W	ar	ØD (min-max)			
QFFD16-03DR/L10-100H	1.000×1.000	6	1.024	0.118	0.394	3.937-5.906	ZTFD0303-MG	GB70-85-M6×20	WH50L
QFFD16-03DR/L17-100H	1.000×1.000	6	1.024	0.118	0.669	3.937-5.906			
QFGD16-04DR/L13-52H	1.000×1.000	6	1.024	0.157	0.512	2.047-2.835	ZTGD0404-MG		
QFGD16-04DR/L22-52H	1.000×1.000	6	1.024	0.157	0.866	2.047-2.835			
QFGD16-04DR/L13-64H	1.000×1.000	6	1.024	0.157	0.512	2.520-3.937			
QFGD16-04DR/L22-64H	1.000×1.000	6	1.024	0.157	0.866	2.520-3.937			
QFGD16-04DR/L13-90H	1.000×1.000	6	1.024	0.157	0.512	3.543-5.512			
QFGD16-04DR/L22-90H	1.000×1.000	6	1.024	0.157	0.866	3.543-5.512			
QFGD16-04DR/L13-130H	1.000×1.000	6	1.024	0.157	0.512	5.118-9.055			
QFGD16-04DR/L22-130H	1.000×1.000	6	1.024	0.157	0.866	5.118-9.055			
QFHD16-05DR/L13-58H	1.000×1.000	6	1.024	0.197	0.512	2.238-3.780	ZTHD0504-MG		
QFHD16-05DR/L22-58H	1.000×1.000	6	1.024	0.197	0.866	2.238-3.780			
QFHD16-05DR/L13-86H	1.000×1.000	6	1.024	0.197	0.512	3.386-5.512			
QFHD16-05DR/L22-86H	1.000×1.000	6	1.024	0.197	0.866	3.386-5.512			
QFHD16-05DR/L13-130H	1.000×1.000	6	1.024	0.197	0.512	5.118-7.874			
QFHD16-05DR/L22-130H	1.000×1.000	6	1.024	0.197	0.866	5.118-7.874			
QFHD16-05DR/L13-185H	1.000×1.000	6	1.024	0.197	0.512	7.283-15.748			
QFHD16-05DR/L22-185H	1.000×1.000	6	1.024	0.197	0.866	7.283-15.748			
QFHS16-05DR/L30-185H	1.000×1.000	6	1.024	0.197	1.181	7.283-15.748	ZTHS0504-MG		
QFKD16-06DR/L13-60H	1.000×1.000	6	1.024	0.236	0.512	2.362-3.937	ZTKD0608-MG		
QFKD16-06DR/L22-60H	1.000×1.000	6	1.024	0.236	0.866	2.362-3.937			
QFKD16-06DR/L13-88H	1.000×1.000	6	1.024	0.236	0.512	3.465-7.087			
QFKD16-06DR/L22-88H	1.000×1.000	6	1.024	0.236	0.866	3.465-7.087			
QFKD16-06DR/L13-160H	1.000×1.000	6	1.024	0.236	0.512	6.299-15.748			
QFKD16-06DR/L22-160H	1.000×1.000	6	1.024	0.236	0.866	6.299-15.748	ZTKS0608-MG		
QFKS16-06DR/L30-160H	1.000×1.000	6	1.024	0.236	1.181	6.299-15.748			
QFLD16-08DR/L25-75H	1.000×1.000	6	1.063	0.315	0.984	2.953-5.906	ZTLD0808-MM		
QFLD16-08DR/L25-140H	1.000×1.000	6	1.063	0.315	0.984	5.512-15.748			
QFLD20-08ER/L28-140H	1.250×1.250	7	1.181	0.315	1.102	5.512-15.748		GB70-85-M8×30	WH60L


Face Grooving and Turning Tools

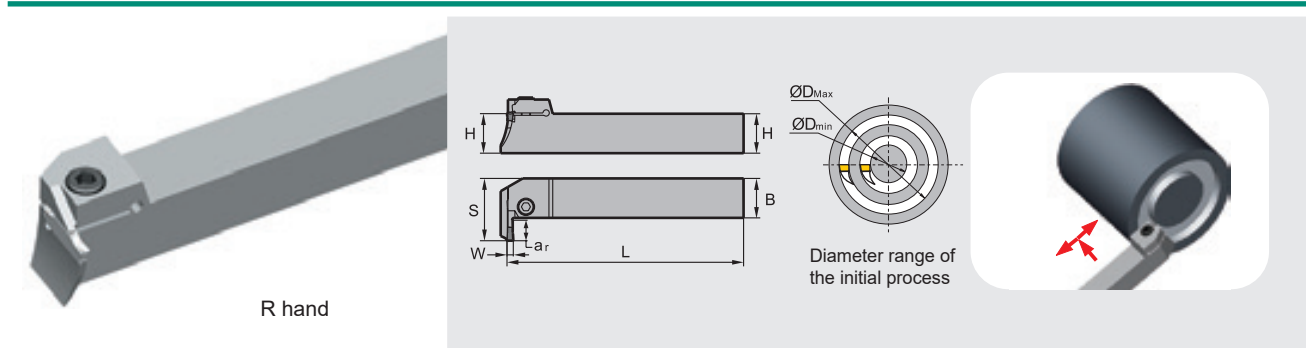

Type	Dimension(inch)						Inserts	Screw	Wrench						
	H×B	L	S	W	ar	ØD (min-max)									
QFFD16-03DR/L10-48L	1.000×1.000	6	1.024	0.118	0.394	1.890-2.598	ZTFD0303-MG	GB70-85-M6×20	WH50L						
QFFD16-03DR/L17-48L	1.000×1.000	6	1.024	0.118	0.669	1.890-2.598									
QFFD16-03DR/L10-60L	1.000×1.000	6	1.024	0.118	0.394	2.362-3.150									
QFFD16-03DR/L17-60L	1.000×1.000	6	1.024	0.118	0.669	2.362-3.150									
QFFD16-03DR/L10-74L	1.000×1.000	6	1.024	0.118	0.394	2.913-4.331									
QFFD16-03DR/L17-74L	1.000×1.000	6	1.024	0.118	0.669	2.913-4.331									
QFFD16-03DR/L10-100L	1.000×1.000	6	1.024	0.118	0.394	3.937-5.906									
QFFD16-03DR/L17-100L	1.000×1.000	6	1.024	0.118	0.669	3.937-5.906									
QFGD16-04DR/L13-52L	1.000×1.000	6	1.024	0.157	0.512	2.047-2.835	ZTGD0404-MG			GB70-85-M6×20	WH50L				
QFGD16-04DR/L22-52L	1.000×1.000	6	1.024	0.157	0.866	2.047-2.835									
QFGD16-04DR/L13-64L	1.000×1.000	6	1.024	0.157	0.512	2.520-3.937									
QFGD16-04DR/L22-64L	1.000×1.000	6	1.024	0.157	0.866	2.520-3.937									
QFGD16-04DR/L13-90L	1.000×1.000	6	1.024	0.157	0.512	3.543-5.512									
QFGD16-04DR/L22-90L	1.000×1.000	6	1.024	0.157	0.866	3.543-5.512									
QFGD16-04DR/L13-130L	1.000×1.000	6	1.024	0.157	0.512	5.118-9.055									
QFGD16-04DR/L22-130L	1.000×1.000	6	1.024	0.157	0.866	5.118-9.055									
QFHD16-05DR/L13-58L	1.000×1.000	6	1.024	0.197	0.512	2.238-3.780	ZTHD0504-MG					GB70-85-M6×20	WH50L		
QFHD16-05DR/L22-58L	1.000×1.000	6	1.024	0.197	0.866	2.238-3.780									
QFHD16-05DR/L13-86L	1.000×1.000	6	1.024	0.197	0.512	3.386-5.512									
QFHD16-05DR/L22-86L	1.000×1.000	6	1.024	0.197	0.866	3.386-5.512									
QFHD16-05DR/L13-130L	1.000×1.000	6	1.024	0.197	0.512	5.118-7.874									
QFHD16-05DR/L22-130L	1.000×1.000	6	1.024	0.197	0.866	5.118-7.874									
QFHD16-05DR/L13-185L	1.000×1.000	6	1.024	0.197	0.512	7.283-15.748									
QFHD16-05DR/L22-185L	1.000×1.000	6	1.024	0.197	0.866	7.283-15.748									
QFHS16-05DR/L30-185L	1.000×1.000	6	1.024	0.197	1.181	7.283-15.748	ZTHS0504-MG							GB70-85-M6×20	WH50L
QFKD16-06DR/L13-60L	1.000×1.000	6	1.024	0.236	0.512	2.362-3.937	ZTKD0608-MG								
QFKD16-06DR/L22-60L	1.000×1.000	6	1.024	0.236	0.866	2.362-3.937									
QFKD16-06DR/L13-88L	1.000×1.000	6	1.024	0.236	0.512	3.465-7.087									
QFKD16-06DR/L22-88L	1.000×1.000	6	1.024	0.236	0.866	3.465-7.087									
QFKD16-06DR/L13-160L	1.000×1.000	6	1.024	0.236	0.512	6.299-15.748									
QFKD16-06DR/L22-160L	1.000×1.000	6	1.024	0.236	0.866	6.299-15.748									
QFKS16-06DR/L30-160L	1.000×1.000	6	1.024	0.236	1.181	6.299-15.748	ZTKS0608-MG								



Internal cutting tools code key

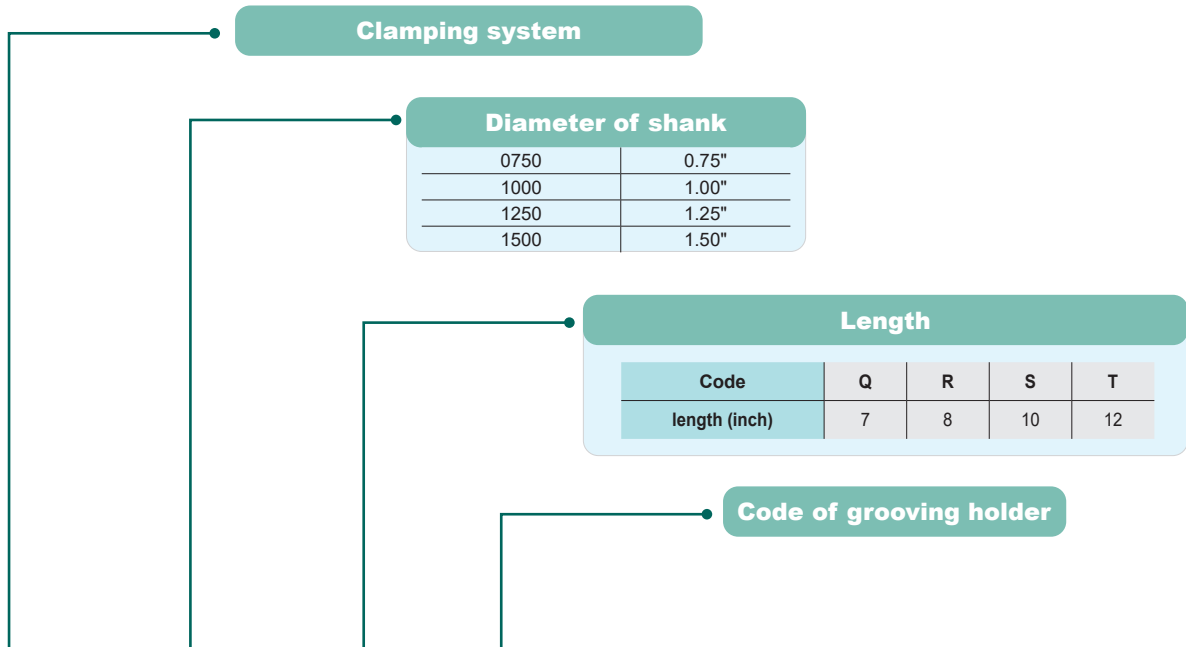

C 1250 S - Q G D R 11 14

Code of locating slot

Accords with locating slot code of insert and corresponding to the width of cutting edge.

Code of locating slot	E	F	G	H	K
Width of cutting edge(inch)	0.098	0.118	0.157	0.197	0.236

Number of cutting edge

S	Single cutting edge
D	Double cutting edges

Cutting direction

R	Right hand
L	Left hand


Maximum cutting depth(a_{max})

Minimum machining diameter($\varnothing D$)

Internal grooving and turning tools



R hand

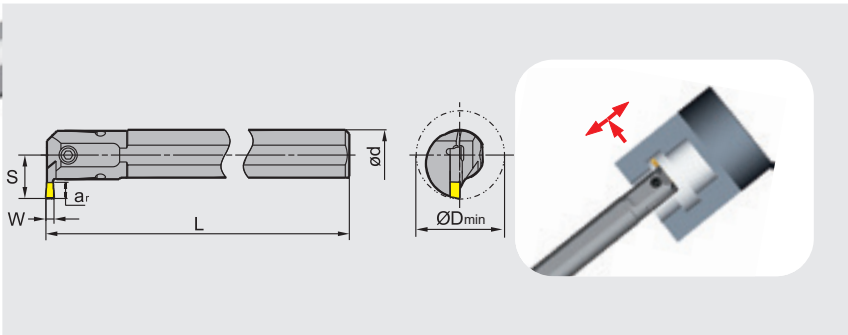

Type	Dimension(inch)						Applicable inserts	Screw	Wrench
	ød	L	S	W	a _{rmax}	ØD			
C0750Q-QEDR/L05-27	0.750	7	0.598	0.098	0.197	1.063	ZTED025-□□ ZRED□□□□-□□	GB70-85-M4×12	WH30L
C1000R-QEDR/L07-33	1.000	8	0.799	0.098	0.276	1.299		GB70-85-M5×16	WH40L
C1250S-QEDR/L09-42	1.250	10	0.996	0.098	0.354	1.654		GB70-85-M5×20	
C0750Q-QFDR/L05-27	0.750	7	0.598	0.118	0.197	1.063	ZTFD□□□□-□□ ZRFD□□□□-□□	GB70-85-M4×12	WH30L
C1000R-QFDR/L07-33	1.000	8	0.799	0.118	0.276	1.299		GB70-85-M5×16	WH40L
C1250S-QFDR/L09-42	1.250	10	0.966	0.118	0.354	1.654		GB70-85-M5×20	
C1000R-QGDR/L08-35	1.000	8	0.846	0.157	0.315	1.378	ZTGD□□□□-□□ ZRGD□□□□-□□	GB70-85-M5×16	WH40L
C1250S-QGDR/L11-44	1.250	10	1.083	0.157	0.433	1.732		GB70-85-M6×20	WH50L
C1500T-QGDR/L13-54	1.500	12	1.319	0.157	0.512	2.216		GB70-85-M6×20	
C1000R-QHDR/L08-35	1.000	8	0.846	0.197	0.315	1.378	ZTHD□□□□-□□ ZRHD□□□□-□□	GB70-85-M5×16	WH40L
C1250S-QHDR/L11-44	1.250	10	1.083	0.197	0.433	1.732		GB70-85-M6×20	WH50L
C1500T-QHDR/L13-54	1.500	12	1.319	0.197	0.512	2.126		GB70-85-M6×20	
C1000R-QKDR/L08-35	1.000	8	0.846	0.236	0.315	1.378	ZTKD□□□□-□□ ZRKD□□□□-□□	GB70-85-M5×16	WH40L
C1250S-QKDR/L11-44	1.250	10	1.083	0.236	0.433	1.732		GB70-85-M6×20	WH50L
C1500T-QKDR/L13-54	1.500	12	1.319	0.236	0.512	2.126		GB70-85-M6×20	


Recommended cutting parameters for parting and grooving tools

Insert size	Recommended feed rate(inch/r)			
Insert width(inch)	Parting	Grooving	Turning	Profiling
0.098	0.002-0.006	0.002-0.006	0.002-0.006	0.002-0.006
0.118	0.002-0.006	0.002-0.006	0.003-0.006	0.004-0.008
0.157	0.002-0.008	0.002-0.008	0.003-0.010	0.004-0.008
0.197	0.003-0.008	0.003-0.009	0.004-0.010	0.006-0.012
0.236	0.004-0.012	0.003-0.010	0.004-0.012	0.006-0.012

Workpiece material	Hardness	YBG302	YBG202 YBG205	YBG105	YBG212	YBC151	YBC251	YBS103	YD101	YD201	YBG102
P	Carbon steel	125≤HB≤170	100-850	500-1000			450-1000	500-900			
	Low alloy steel	180≤HB≤275	260-600	360-650			300-800	360-650			
	High alloy steel	180≤HB≤325	260-500	360-600			300-700	360-600			
	Cast steel	180≤HB≤250	240-450	300-550			260-500	300-550			
M	Ferrite, Martensite	200≤HB≤300	230-550	300-650				300-650			
	Austenite	180≤HB≤300	260-650	360-700				360-700			
K	Malleable cast iron	130≤HB≤230	300-650	400-700						300-500	
	Grey cast iron	180≤HB≤220	300-550	400-650						260-450	
	Nodular cast iron	160≤HB≤250	260-500	360-600						200-450	
N	Al alloy	--							650-1300		
S	High-temperature alloy	≤400			130-230	60-160		100-260	60-160		100-200

The cutting parameters recommended are suitable for wet machining.

Advice: internal machining and face machining, the cutting speed should be reduced by 30%-40%.

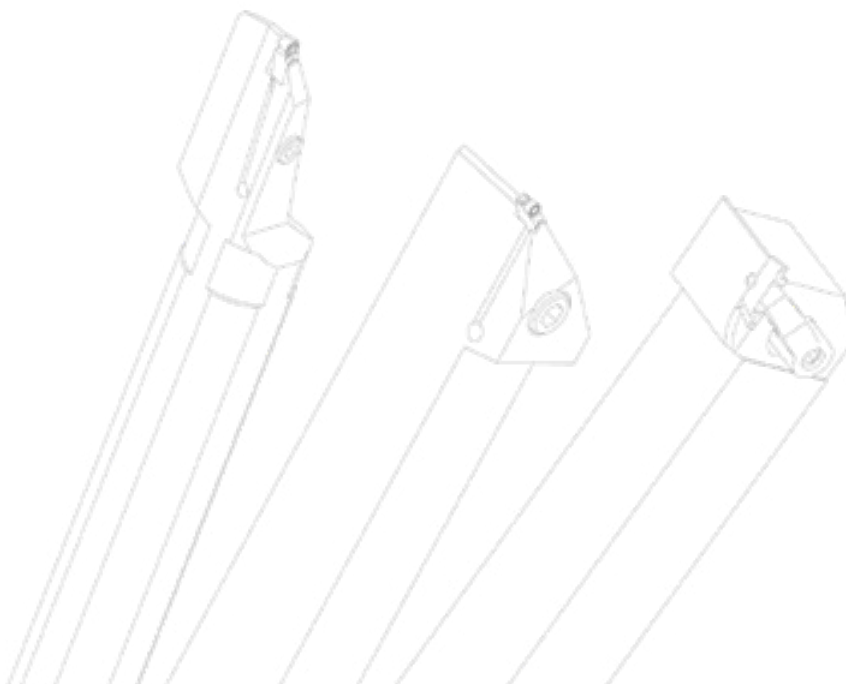

Centerline Parting and Grooving Tools

- No matter which parting or grooving tools are selected, the best performance is realized when insert is positioned at the centerline of workpiece. This also reduces vibrations during machining.
- The insert cutting edge and centerline of workpiece should be within $\pm .004$. For parting and grooving workpieces with small diameter, this especially true to reduce cutting force, reduce burring, and improve tool life.

Parting

- When the insert is approaching center of workpiece, the cutting speed should be reduced by 30%, which is good for improving tool life and surface quality.
- Whenever possible, shorten the overhang of the tool as much as possible to ensure good stability.

External grooving, turning, and profiling

- In-Feed Sequence: When Cutting Depth > 0.020 ", Radial in-feed (Max. Cutting depth can be $3/4$ of the insert edge width) $\rightarrow$ Radial out-feed about 0.004 " $\rightarrow$ Axial in feed $\rightarrow$ Flank out-feed $\rightarrow$ Axial in feed $\rightarrow$ Radial machining to required depth.
- When finishing, use sequence as shown in the diagram to reduce vibration.

Face grooving and turning

- Finishing Machining (Multi-slot Cutting)
First cut inward from max diameter of face opening, then reposition insert, as shown in diagram (1).
- Face groove turning
Axial turning depth should not be more than $3/4$ of the cutting edge width.
When slot width is larger than slot depth, turn with multiple passes, as shown in the picture (2).
- Finishing Machining
First finish machine bottom and external diameter fringe, then finish the internal diameter to required size, as shown in the picture (3).

Internal grooving and turning

- For good chip flow, follow the machining sequence in the diagram shown. Infeed from the deepest end of the hole and then back turn.

